

38219-MD

4 Channel DC Motor Driver

Quad HG7881 module can drive 4 DC motors.

Suitable for 2.5V-12V motors

Power: 2.5-12VDC (Same as Motor)

Each channel has 4 Output States:

Channel A shown Below Others are the same

1: A1 High (+) A2 Low (Gnd) Rotate 1 Direction

2: A1 Low A2 High: Rotate Opposite Direction

3: A1 & A2 High: Hard Stop Motor Locked (Brake)

4: A1 & A2 Low: Tri-State Output Motor Freewheel

0.8A Maximum Operating Current/Channel

Connections:

Inputs: 0.1" Pitch Header Pins

Outputs: Terminal Strip


L: 49mm (1-15/16") **W:** 36mm (1-11/16")

H: 12mm (1/2") **WT:** .02

CHIP INPUT TABLE

HEADER	CHIP	PIN	FUNC
A1	A	7	FI (Fwd In)
A2	A	6	BI (Backward in)
B1	B	7	FI
B2	B	6	BI
C1	C	7	FI
C2	C	6	BI
D1	D	7	FI
D2	D	6	BI

NOTE: "Forward/Backward is relative to how you connect the motor

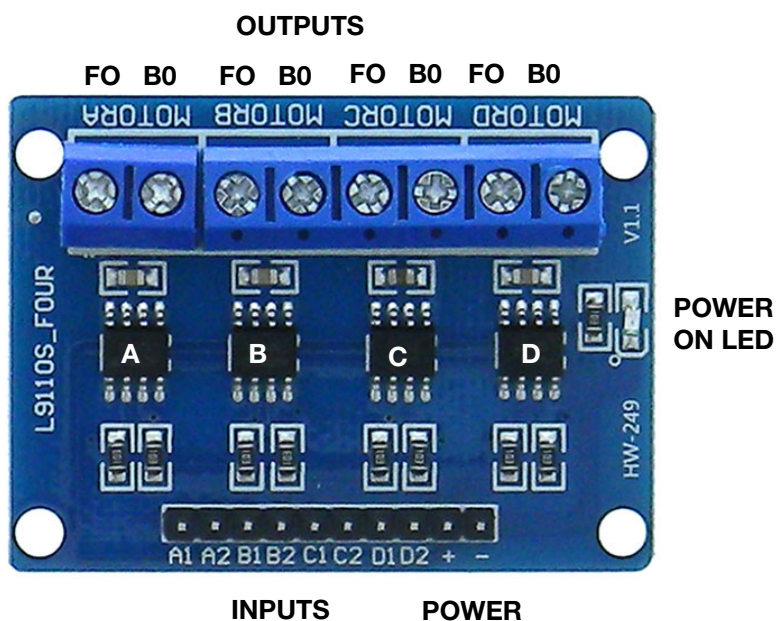

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
All rights are retained by the respective Owners/Author(s)


MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM



Description :

HG7881C is a DC motor control and drive the design of the power amplifier application specific integrated circuit devices, The discrete circuitry integrated into the IC chip, To reduce the cost of external devices, Improve machine reliability. The chip has a good resistance; Two output Pin can directly drive the motor forward and backward movement, It has a large current drive capability, At the same time, it has a low output saturation voltage and quiescent current ; Built-in clamp diode to reverse the impact of the release of inductive load current, It in the driving relays, DC motors, stepper motors or control the use of switching power safe and reliably. HG7881C are widely used in motor drive toy cars, remote-controlled aircraft motor drive, automatic valve motor drive, electromagnetic lock drive, digital camera, camera motors, precision instruments and other circuits.

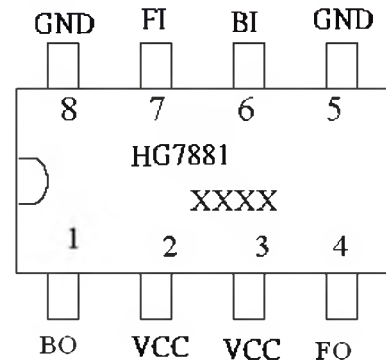

Features :

- Quiescent current is less than 2 μ A
- Low no-load operating current: 15 \pm 5 mA
- Wide supply voltage range 2.4V~10V
- Built-in clamp-diode
- Emergency-stop function (braking function when both inputs are high, "11" protection)

Pin Assignment :

Pin No.	Name	Function
1	BO	backward output
2	VCC	power supply
3	VCC	power supply
4	FO	forward output
5	GND	ground
6	BI	backward input
7	FI	forward input
8	GND	ground

Input truth table :

Pin 7 FI	Pin 6 BI	Pin 4 FO	Pin 1 BO	
H	L	H	L	forward
L	H	L	H	backward
H	H	L	L	brake
L	L	Open	Open	stand-by (stop)


Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
power dissipation	P_D	1	W
max. supply voltage	V_{CC}	15	V
peak output current	I_{out}	1.5	A
operating temperature	T_{op}	-25 ~ +85	°C
storage temperature	T_{stg}	-55 ~ +125	°C


Electrical characteristics

 ($V_{CC}=9V$, $T_a=25^{\circ}C$ unless specified otherwise)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
operating voltage	V_{OPR}		2.4	--	10	V
quiescent current	I_s	$V_i = 0$			2	μA
no-load operating curr.	I_{CC}	$V_{CC} = 6V$ $V_i = 2V$ (no load)	10	15	20	mA
high output voltage	V_{HOUT}	$V_{CC} = 6V$ $I_o = 800mA$	4.5	4.8	5.2	V
low output voltage	V_{LOUT}		0.3	0.5	0.9	V
high input voltage	V_{IH}		1.8	2	6	V
low input voltage	V_{IL}			0.5	0.7	V
low input current	I_i	$V_{CC} = 6V$ $V_i = 2V$		70	100	μA
		$V_{CC} = 6V$ $V_i = 3V$		100	150	μA
continuous input current	I_{out}	SOP8 package		0.6	0.8	A
		DIP8 package		1.0	1.1	A
peak output current	I_{PEAK}				1.5	A
clamp diode leakage curr.	I_{LEAK}	$V_{CC} = 9V$	-	-	30	μA
clamp diode voltage drop	V_D	$I_{OUT} = 0.4A$	-	-	1.7	V

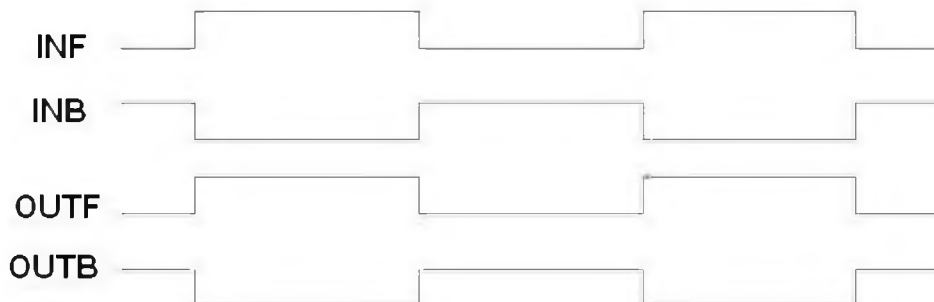Pins Waveforms :


Function block diagram

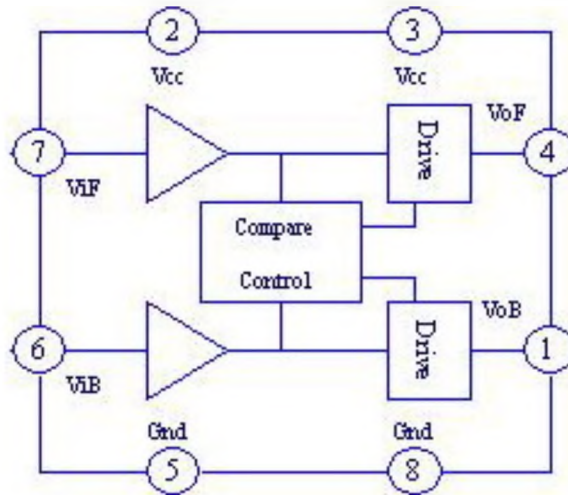


Application circuit

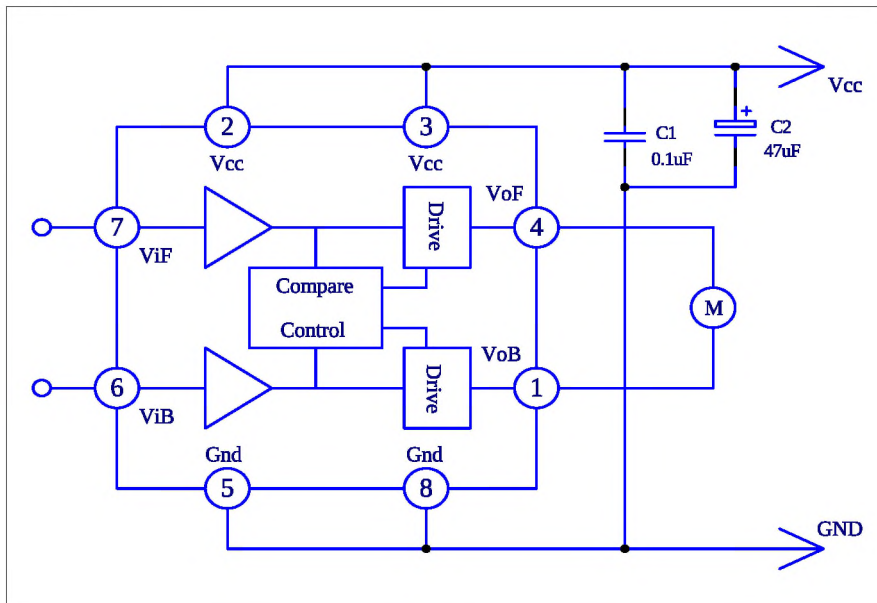

Package mechanical drawing

8-DIP

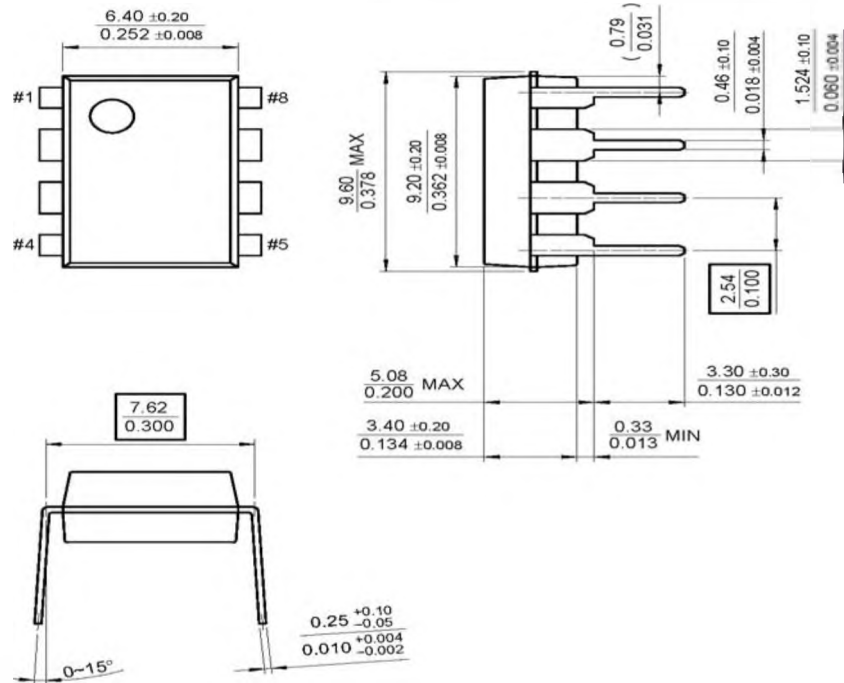

8-SOP

