

37893-ME

Mini Panel Meter Red LED Display 0 to 99.9 Volts & 1 Amp

Mini snap-in LED panel meter contains both a 3-digit Digital DC Volt Meter and a 3-digit Amp. meter.

Operating Voltage: 4.5 to 28VDC

Separate Meter Power required if Measured Voltage is <4.5 or > 28VDC

Measured Voltage: 0.00 to 99.9V

Resolution: .01/0.1

Operating Current: <30mA

Measured Current: 0.00 to 999mA

Refresh Rate: 300ms

Accuracy: 1% (± 1 digit)

Operating Temperature: -10 to 65°C

Operating Humidity: 10 to 80% (non-condensing)

Cutout: 45mm X 27mm

Connections: 5" Leads

Ammeter Connects in the return side of Load

Cutout: 46x 27mm



W: 1-7/8" **H:** 1-1/8" **D:** 1-1/2"(inc. Con.) **WT:** .06

NOTE: Measures DC Only!

Unfiltered DC, PWM DC, Noisy Input/Outputs from Boost/Buck Converters Will Cause Errors OR Meter Display may Blank



TO CALIBRATE
CURRENT: REMOVE
CURRENT INPUT AND
SHORT TERMINALS

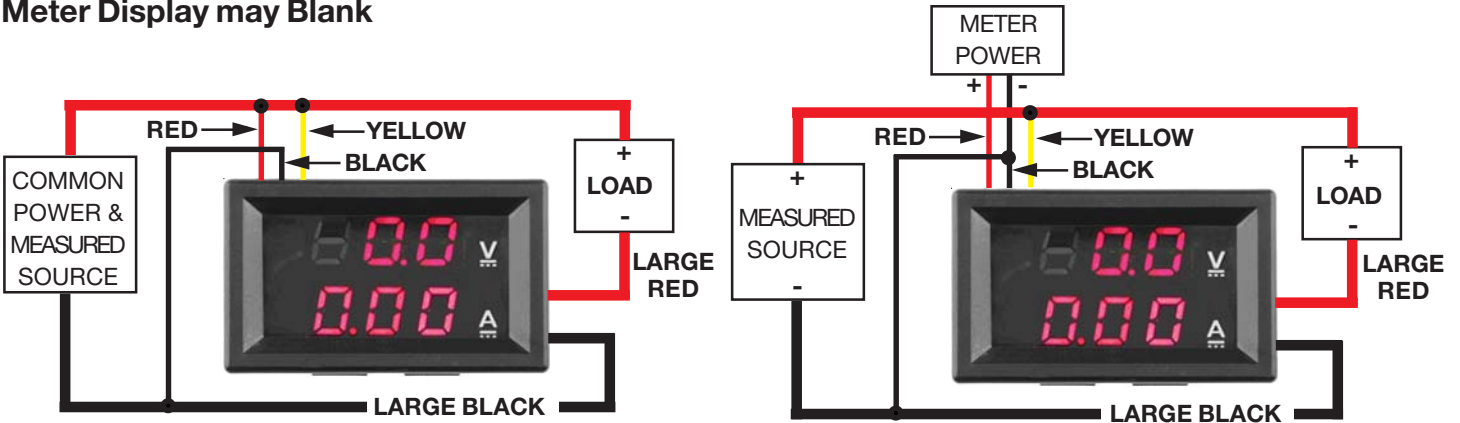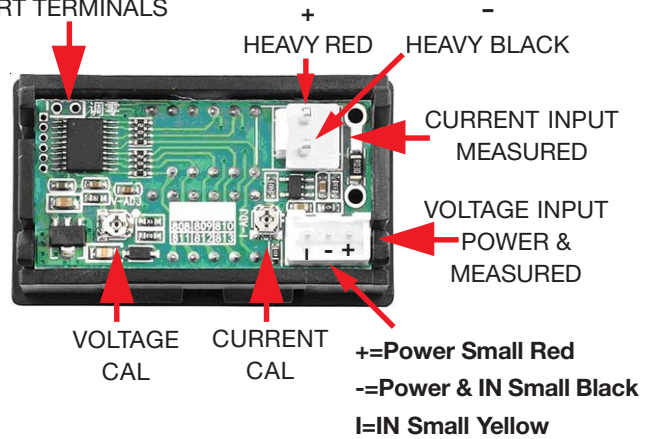

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM