

38434-RL

24VAC 4PDT, 3A Relay

MFG: TAIMING

P/N: HH54P

COIL: 24VAC/150 ohms

CONTACT RATING: 3A@ 250VAC/28VDC


ACTION: DPDT

Socket Mount (can be soldered), General purpose relay with a Red LED to show coil is energized.

DIN Mount Socket: Order 37886-RL

L: 27mm (1") **W:** 21mm (13/16") **H:** 35mm (1-3/8") Body

WT: .07

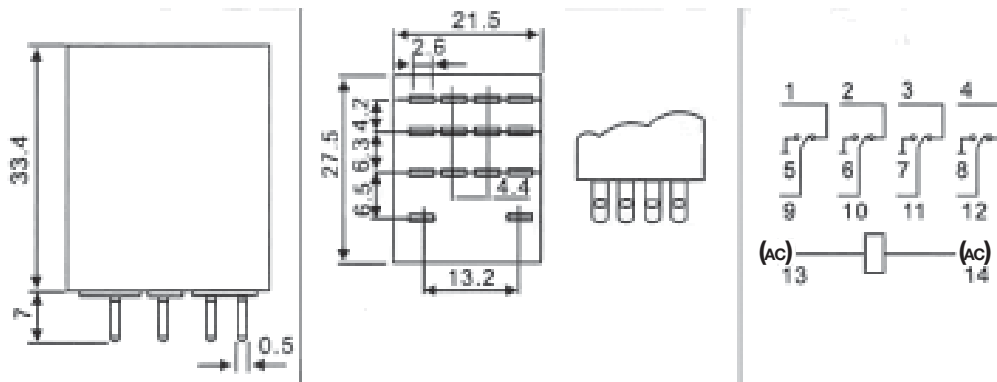

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM