

38476-SU

24VDC Dual Function Piezo Alarm

Panel mount, 3 terminal Piezo type alarm with constant or pulse tone output. Black ABS Body

Voltage: 5-24VDC 12V Nominal

Current: <25mA

Sound Pressure: >80dB

@ 1m at Rated Voltage

Tone Frequency: 3±0.5kHz

Tone: Constant or Pulsing (Rate Varies over Voltage Range)

Operating Temperature: -30°C to ~ +75°C


Thread: M31.7x1.25 Includes Nut

Mounting Hole: 32mm

Connections: 4.8mm (0.187") Quick Connect

RoHS

DIA: 36.3mm (Face) 41.4mm (Nut) **L:** 26mm (Body) **WT:** .04

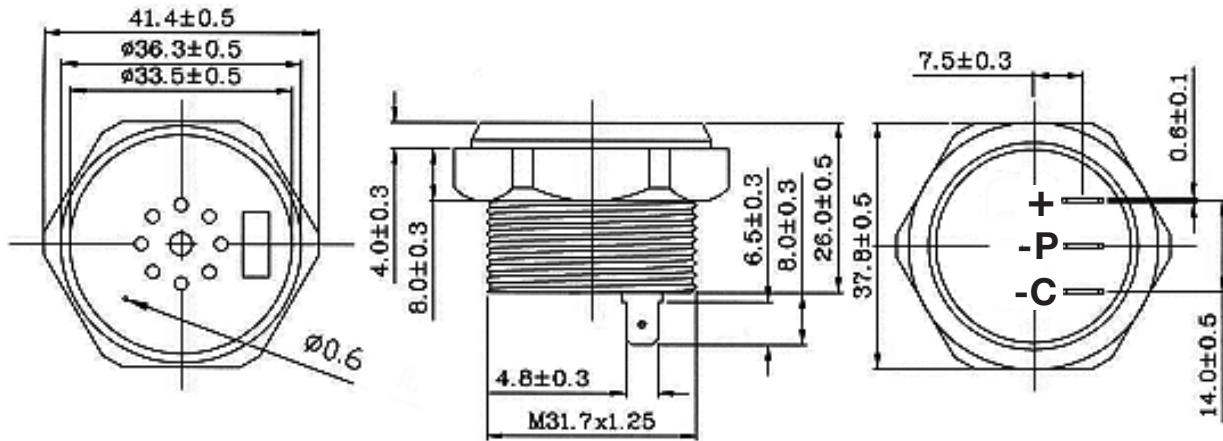

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice

All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

8380 Resource Rd. West Palm Beach, FL 33404

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM