

38225-RL

12V, Single Channel, Multifunction, Remote Control Relay

Single Channel wireless remote control relay.

3 Jumper selectable Modes

1: Jog: Relay energized (ON) as long as Button Pressed.

2: Interlocked: Press 1 Button to Energize;(ON) Press Other Button to turn OFF

3: Toggle/Alternate Action: Press ON-Press OFF Same Button

Module Voltage: 12VDC

Idle Current: <10mA

Frequency: 433mHz

Temperature: -20° C+60°

Receiving Sensitivity: >-105dB

Relay: SPDT

Contacts: 10A@125/250VAC/30VDC

Module:

L: 1-3/8" **W:** 1-3/16" **H:** 5/8"

Key FOB Remote:

L: 2-3/8" **W:** 1-1/8" **T:** 1/2"

WT: .15

MODE SETUP:

Recommend Clearing Codes When Changing Modes

1. Jog: Relay Active as Long As Button Pressed:

Remove the Jumper Cap. Press the Pairing Button (~2 seconds), Release, the LED will be ON.

NOTE: Either But Not Both Buttons Can Be Paired.

To pair **A**: press **A** Button on Remote; To Pair **B**, Press **B** Button.

Press A or B within 15 seconds. The LED flashes 2 times, Then OFF.

2. Interlocked: 1 Button Turns ON other Button Turns OFF

NOTE: Either **A** is ON and **B** is OFF OR **B** is ON and **A** OFF

Place the Jumper cap on **G** to **L**,

Press Pairing Button (~2 seconds), Release. Red LED will be ON. Press Button A or B on Remote within 15sec to select ON Button. LED flashes 2 times and stays ON. Press other Button, LED flashes 2 times and stays OFF. The code will be paired within 15 second window.

3. Toggle: Alternate Push ON; Push OFF. Place the Jumper cap on **G** to **T**, Press the Pairing Button (~2 seconds) Release. Red LED will be ON. Within 15sec Press either Button A or B to select active Button, LED will flash 2 times then turn OFF. Other Button is Inoperable.

4. Code Reset: Press and Hold the Pairing Button for 5 seconds, the LED flashes 4 times, denoting code clearing was successful.

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice

All rights are retained by the respective Owners/Author(s)




MARLIN P. JONES & ASSOC., INC.

8380 Resource Rd. West Palm Beach, FL 33404

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM

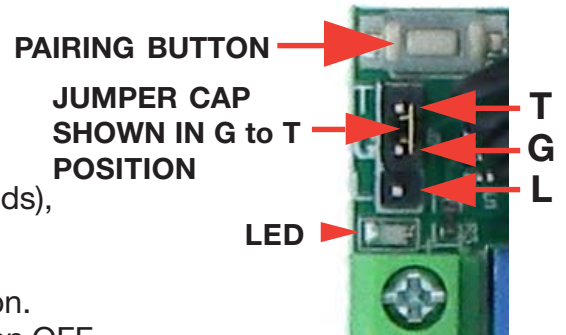

T: Toggle (Alternate Action)

L: Interlocked