

38479-PL

MR60 3 Pin, Male & Female Pair, 30A RC Power Connectors

Mating Pair of MR60 Power Connectors for RC Models.
Amass Style MR Male & Mating Female connector
with snap on sheath (backshell) for the wire side of the
connector.

Pins: Gold Plated Brass

Pitch: 5.5mm

Body: PA nylon (polyamide)

Continuous Current: 30A Max

Instantaneous Current: 60A

Max Voltage: 500V

Initial Resistance: ~.5m Ohm

Connections: Solder Cup

Wire: 12AWG

Operating Temp: -20°C to 120°C


Female

L: 20.2mm **W:** 9.7mm **H:** 22.3mm with Backshell


Male

L: 20.3mm **W:** 9.7mm **H:** 21.8mm with Backshell


WT: .02

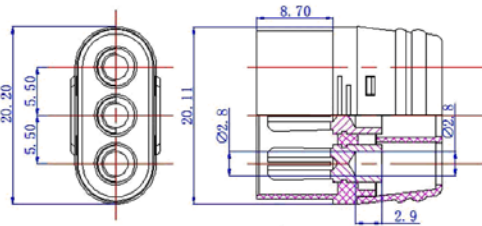

MR60 Male

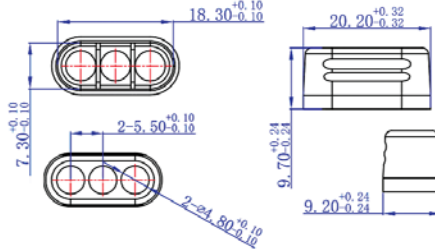

MR60 BACKSHELL

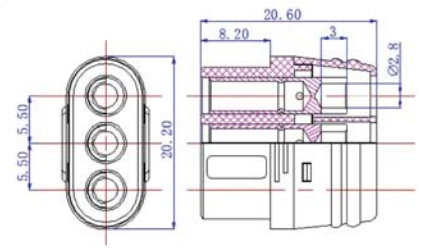

MR60 FEMALE

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice

All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

8380 Resource Rd. West Palm Beach, FL 33404

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM