

# 37032 RG



LM117/217  
LM317

## 1.2V TO 37V VOLTAGE REGULATOR


- OUTPUT VOLTAGE RANGE: 1.2 TO 37V
- OUTPUT CURRENT IN EXCESS OF 1.5A
- 0.1% LINE AND LOAD REGULATION
- FLOATING OPERATION FOR HIGH VOLTAGES
- COMPLETE SERIES OF PROTECTIONS: CURRENT LIMITING, THERMAL SHUTDOWN AND SOA CONTROL

### DESCRIPTION


The LM117/LM217/LM317 are monolithic integrated circuit in TO-220, TO-220FP, TO-3 and D<sup>2</sup>PAK packages intended for use as positive adjustable voltage regulators.

They are designed to supply more than 1.5A of load current with an output voltage adjustable over a 1.2 to 37V range.

The nominal output voltage is selected by means of only a resistive divider, making the device exceptionally easy to use and eliminating the stocking of many fixed regulators.

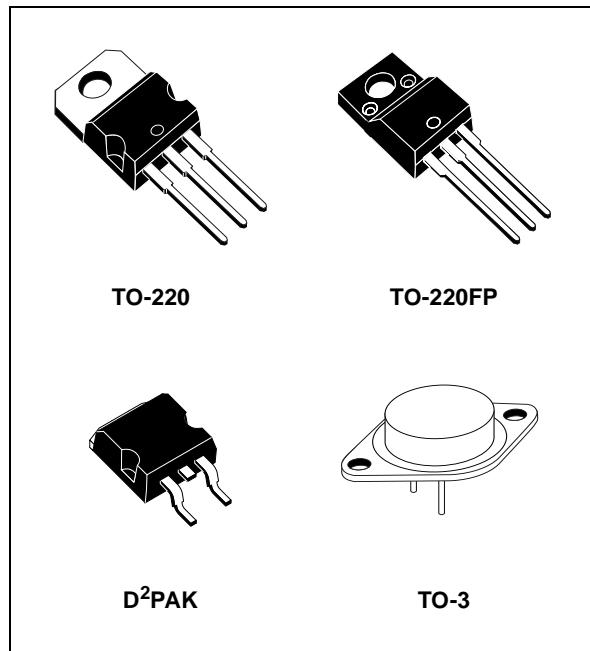

### SCHEMATIC DIAGRAM

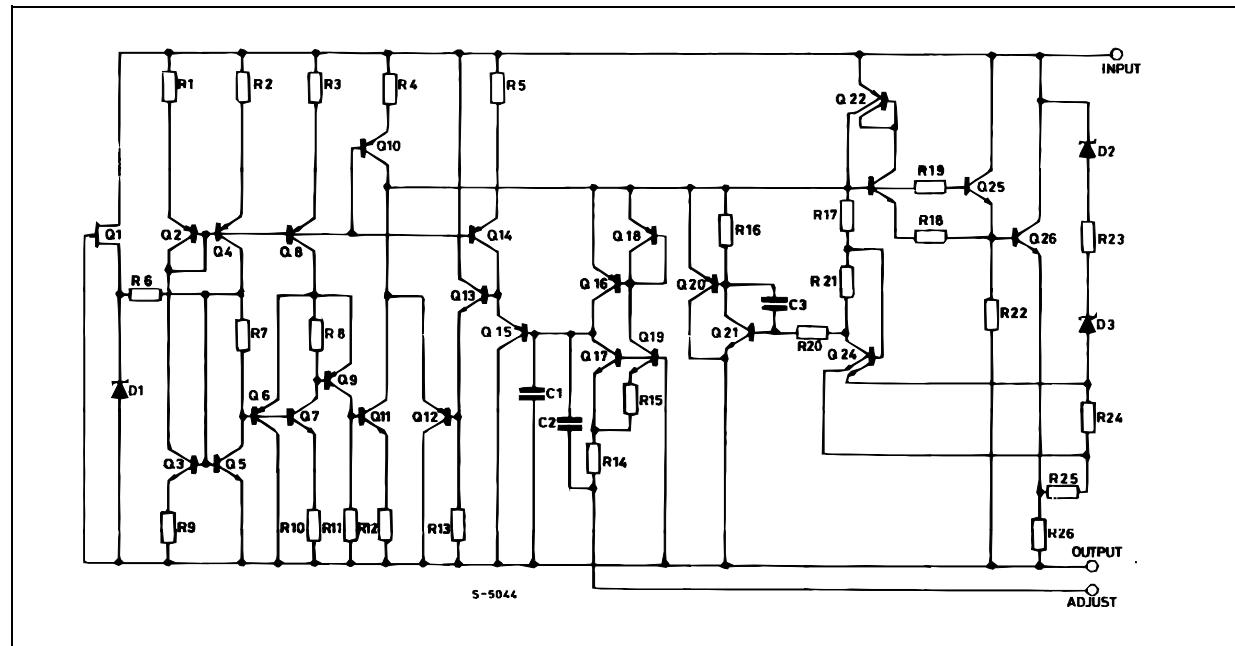

## LM117/217/317

### ABSOLUTE MAXIMUM RATINGS


Symbol	Parameter	Value	Unit
$V_I - V_{REF}$	Input-Reference Differential Voltage	40	V
$I_O$	Output Current	Internally Limited	
$T_{op}$	Operating Junction Temperature for:	LM117	-55 to 150
		LM217	-25 to 150
		LM317	0 to 125
$P_{tot}$	Power Dissipation	Internally Limited	
$T_{stg}$	Storage Temperature	-65 to 150	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

### THERMAL DATA

Symbol	Parameter	D <sup>2</sup> PAK	TO-220	TO-220FP	TO-3	Unit
$R_{thj-case}$	Thermal Resistance Junction-case Max	3	3	5	4	°C/W
$R_{thj-amb}$	Thermal Resistance Junction-ambient Max	62.5	50	60	35	°C/W


### CONNECTION DIAGRAM (top view)

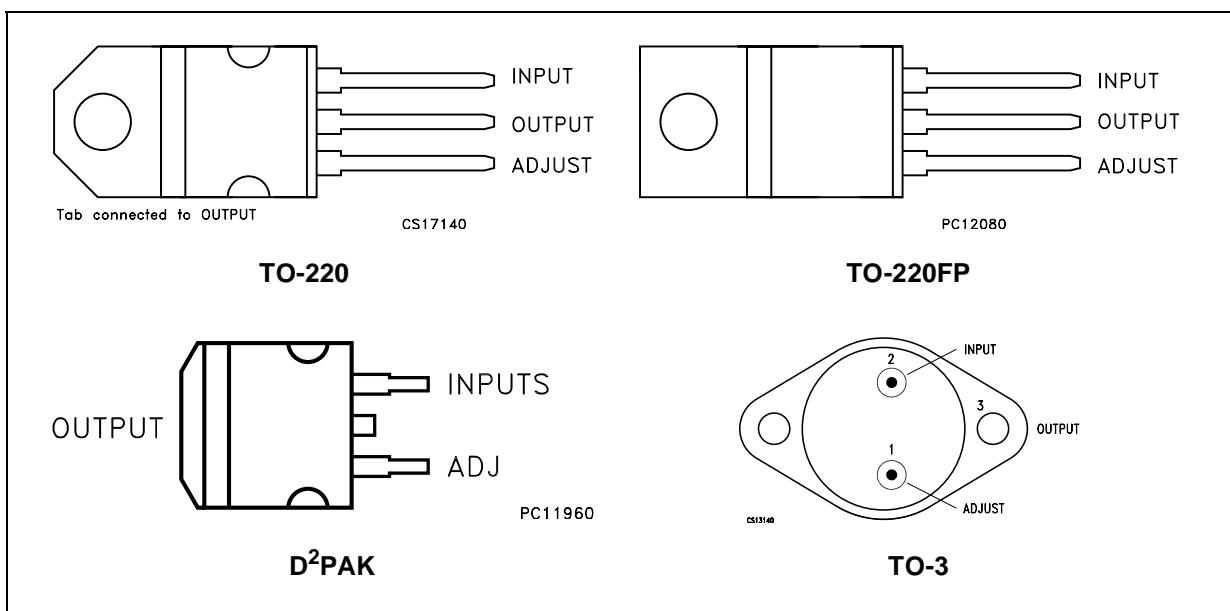

### ORDERING CODES

TYPE	TO-220	D <sup>2</sup> PAK	TO-220FP	TO-3
LM117				LM117K
LM217	LM217T	LM217D2T		LM217K
LM317	LM317T	LM317D2T	LM317P	LM317K

## BASIC ADJUSTABLE REGULATOR

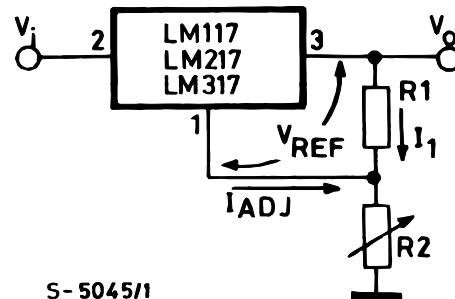

**ELECTRICAL CHARACTERISTICS FOR LM117/LM217 ( $V_I - V_{REF} = 5 \text{ V}$ ,  $I_O = 500 \text{ mA}$ ,  $I_{MAX} = 1.5 \text{ A}$  and  $P_{MAX} = 20 \text{ W}$ ,  $T_J = -55 \text{ to } 150^\circ\text{C}$  for LM117,  $T_J = -25 \text{ to } 150^\circ\text{C}$  for LM217, unless otherwise specified).**

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
$\Delta V_O$	Line Regulation	$V_I - V_{REF} = 3 \text{ to } 40 \text{ V}$	$T_J = 25^\circ\text{C}$		0.01	0.02	%/V
					0.02	0.05	
$\Delta V_O$	Load Regulation	$V_O \leq 5 \text{ V}$ $I_O = 10 \text{ mA} \text{ to } I_{MAX}$	$T_J = 25^\circ\text{C}$		5	15	mV
					20	50	
		$V_O \geq 5 \text{ V}$ $I_O = 10 \text{ mA} \text{ to } I_{MAX}$	$T_J = 25^\circ\text{C}$		0.1	0.3	%
					0.3	1	
$I_{ADJ}$	Adjustment Pin Current				50	100	$\mu\text{A}$
$\Delta I_{ADJ}$	Adjustment Pin Current	$V_I - V_{REF} = 2.5 \text{ to } 40 \text{ V}$	$I_O = 10 \text{ mA} \text{ to } I_{MAX}$		0.2	5	$\mu\text{A}$
$V_{REF}$	Reference Voltage (between pin 3 and pin 1)	$V_I - V_{REF} = 2.5 \text{ to } 40 \text{ V}$	$I_O = 10 \text{ mA} \text{ to } I_{MAX}$	1.2	1.25	1.3	V
$\Delta V_O/V_O$	Output Voltage Temperature Stability				1		%
$I_O(\min)$	Minimum Load Current	$V_I - V_{REF} = 40 \text{ V}$			3.5	5	$\text{mA}$
$I_O(\max)$	Maximum Load Current	$V_I - V_{REF} \leq 15 \text{ V}$	$P_D < P_{MAX}$	1.5	2.2		A
		$V_I - V_{REF} = 40 \text{ V}$	$P_D < P_{MAX}$ $T_J = 25^\circ\text{C}$		0.4		
$eN$	Output Noise Voltage (percentage of $V_O$ )	$B = 10\text{Hz} \text{ to } 100\text{KHz}$	$T_J = 25^\circ\text{C}$		0.003		%
SVR	Supply Voltage Rejection (*)	$T_J = 25^\circ\text{C}$	$f = 120\text{Hz}$	$C_{ADJ}=0$	65		dB
				$C_{ADJ}=10\mu\text{F}$	66	80	


(\*)  $C_{ADJ}$  is connected between pin 1 and ground.

**ELECTRICAL CHARACTERISTICS FOR LM317 ( $V_I - V_{REF} = 5 \text{ V}$ ,  $I_O = 500 \text{ mA}$ ,  $I_{MAX} = 1.5 \text{ A}$  and  $P_{MAX} = 20 \text{ W}$ ,  $T_J = 0 \text{ to } 125^\circ\text{C}$ , unless otherwise specified).**


Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
$\Delta V_O$	Line Regulation	$V_I - V_{REF} = 3 \text{ to } 40 \text{ V}$	$T_J = 25^\circ\text{C}$		0.01	0.04	%/ $V$
					0.02	0.07	
$\Delta V_O$	Load Regulation	$V_O \leq 5 \text{ V}$ $I_O = 10 \text{ mA to } I_{MAX}$	$T_J = 25^\circ\text{C}$		5	25	mV
					20	70	
		$V_O \geq 5 \text{ V}$ $I_O = 10 \text{ mA to } I_{MAX}$	$T_J = 25^\circ\text{C}$		0.1	0.5	%
					0.3	1.5	
$I_{ADJ}$	Adjustment Pin Current				50	100	$\mu\text{A}$
$\Delta I_{ADJ}$	Adjustment Pin Current	$V_I - V_{REF} = 2.5 \text{ to } 40 \text{ V}$	$I_O = 10 \text{ mA to } I_{MAX}$		0.2	5	$\mu\text{A}$
$V_{REF}$	Reference Voltage (between pin 3 and pin 1)	$V_I - V_{REF} = 2.5 \text{ to } 40 \text{ V}$	$I_O = 10 \text{ mA to } I_{MAX}$	1.2	1.25	1.3	V
$\Delta V_O/V_O$	Output Voltage Temperature Stability				1		%
$I_{O(min)}$	Minimum Load Current	$V_I - V_{REF} = 40 \text{ V}$			3.5	10	mA
$I_{O(max)}$	Maximum Load Current	$V_I - V_{REF} \leq 15 \text{ V}$	$P_D < P_{MAX}$	1.5	2.2		A
		$V_I - V_{REF} = 40 \text{ V}$	$P_D < P_{MAX}$ $T_J = 25^\circ\text{C}$		0.4		
eN	Output Noise Voltage (percentage of $V_O$ )	$B = 10\text{Hz to } 100\text{KHz}$	$T_J = 25^\circ\text{C}$		0.003		%
SVR	Supply Voltage Rejection (*)	$T_J = 25^\circ\text{C}$	$f = 120\text{Hz}$	$C_{ADJ}=0$		65	dB
				$C_{ADJ}=10\mu\text{F}$	66	80	



(\*)  $C_{ADJ}$  is connected between pin 1 and ground.

**Figure 1 : Output Current vs Input-output Differential Voltage**

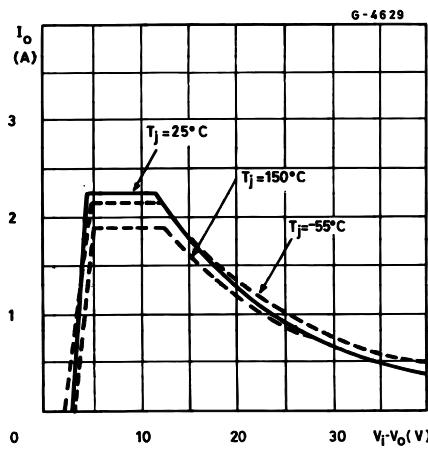

**Figure 2 : Dropout Voltage vs Junction Temperature**

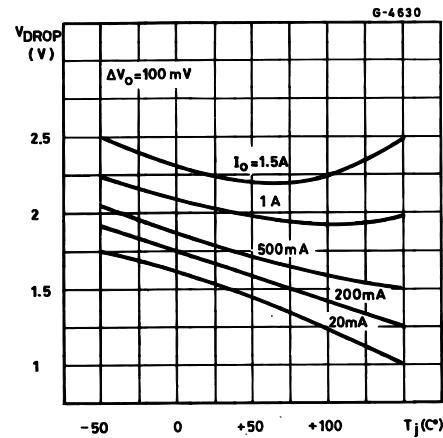

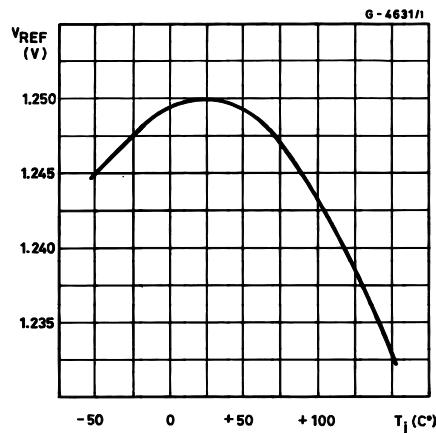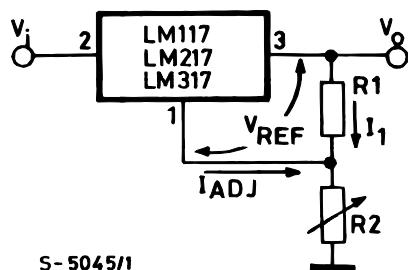**Figure 3 : Reference Voltage vs Junction****Figure 4 : Basic Adjustable Regulator**

### APPLICATION INFORMATION

The LM117/217/317 provides an internal reference voltage of 1.25V between the output and adjustments terminals. This is used to set a constant current flow across an external resistor divider (see fig. 4), giving an output voltage  $V_O$  of:

$$V_O = V_{REF} \left( 1 + \frac{R_2}{R_1} \right) + I_{ADJ} R_2$$

The device was designed to minimize the term  $I_{ADJ}$  (100µA max) and to maintain it very constant with line and load changes. Usually, the error term  $I_{ADJ} \times R_2$  can be neglected. To obtain the previous requirement, all the regulator quiescent current is returned to the output terminal, imposing a minimum load current condition. If the load is insufficient, the output voltage will rise. Since the LM117/217/317 is a floating regulator and "sees" only the input-to-output differential voltage, supplies of very high voltage with respect to ground can be regulated as long as the maximum input-to-output differential is not exceeded. Furthermore, programmable regulator are easily obtainable and, by connecting a fixed resistor between the adjustment and output, the device can be used as a precision current regulator. In order to optimize the load regulation, the current set resistor  $R_1$  (see fig. 4) should be tied as close as possible to the regulator, while the ground terminal of  $R_2$  should be near the ground of the load to provide remote ground sensing. Performance may be improved with added capacitance as follow:


An input bypass capacitor of 0.1µF

An adjustment terminal to ground 10µF capacitor to improve the ripple rejection of about 15 dB ( $C_{ADJ}$ ). An 1µF tantalum (or 25µFAluminium electrolytic) capacitor on the output to improve transient response. In addition to external capacitors, it is good practice to add protection diodes, as shown in fig.5. D1 protect the device against input short circuit, while D2 protect against output short circuit for capacitance discharging.

## LM117/217/317


---

**Table 5 :** Voltage Regulator with Protection Diodes

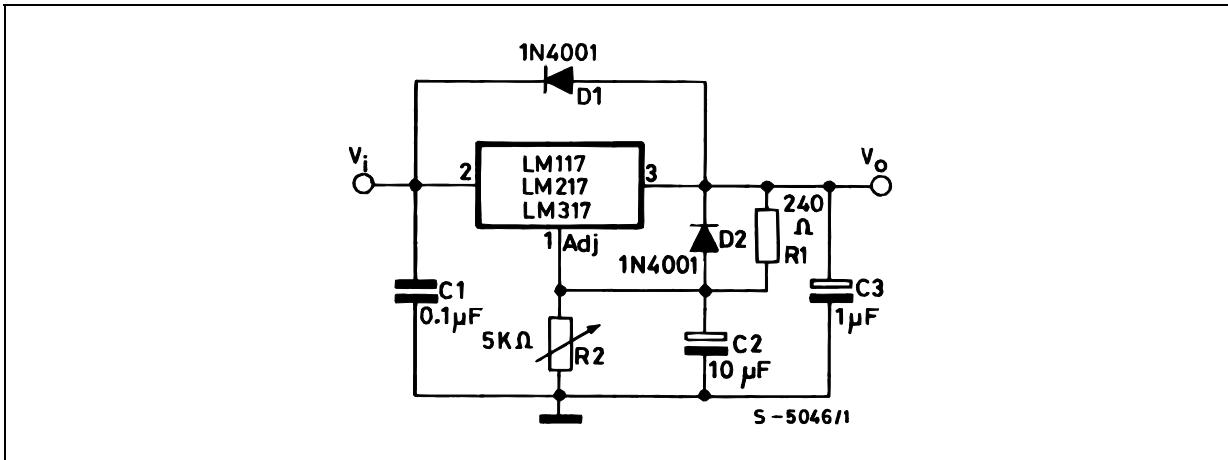




D1 protect the device against input short circuit, while D2 protects against output short circuit for capacitors discharging.

**Figure 6 :** Slow Turn-on 15V Regulator

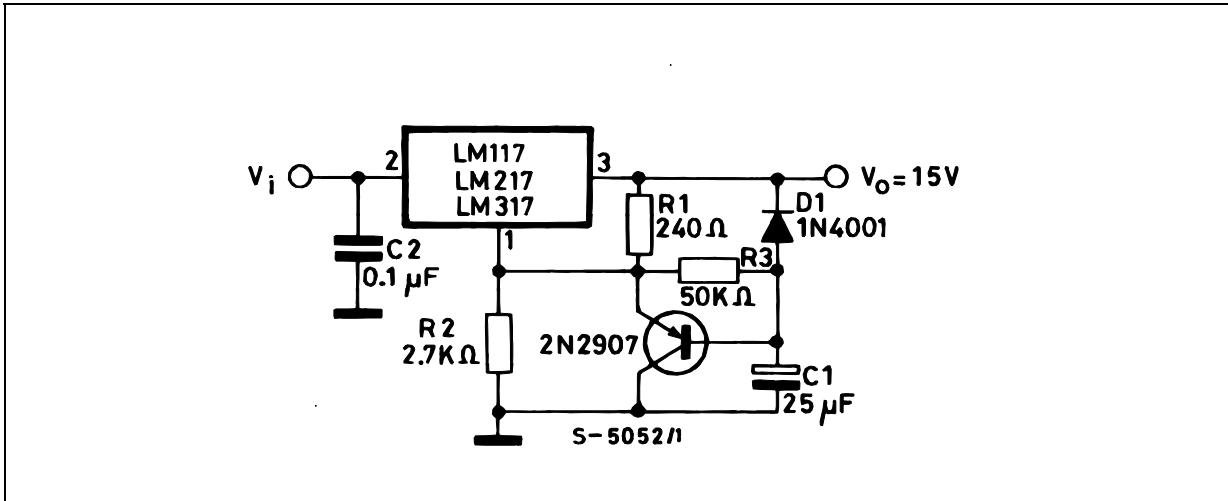


**Figure 7 :** Current Regulator

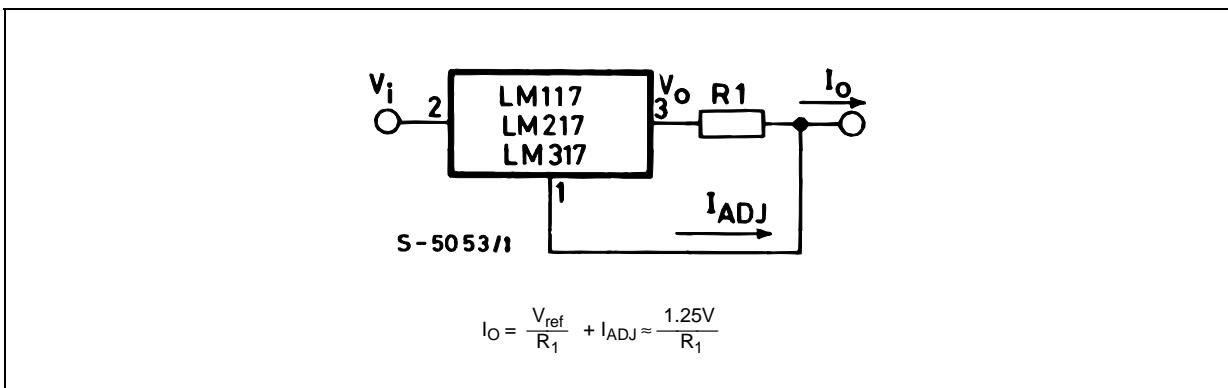

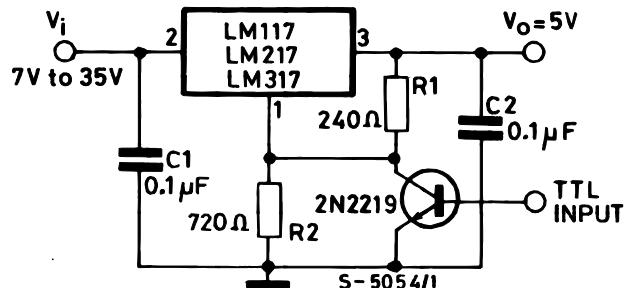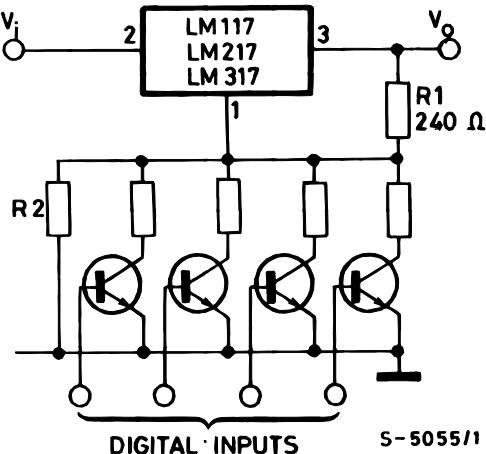**Figure 8 : 5V Electronic Shut-down Regulator****Figure 9 : Digitally Selected Outputs**

( $R_2$  sets maximum  $V_o$ )

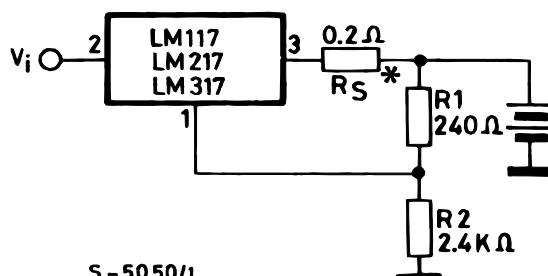
**Figure 10 : Battery Charger (12V)**

\*  $R_S$  sets output impedance of charger  $Z_o = R_S (1 + R_2/R_1)$ . Use of  $R_S$  allows low charging rates with fully charged battery.

## LM117/217/317

---

Figure 11 : Current Limited 6V Charger

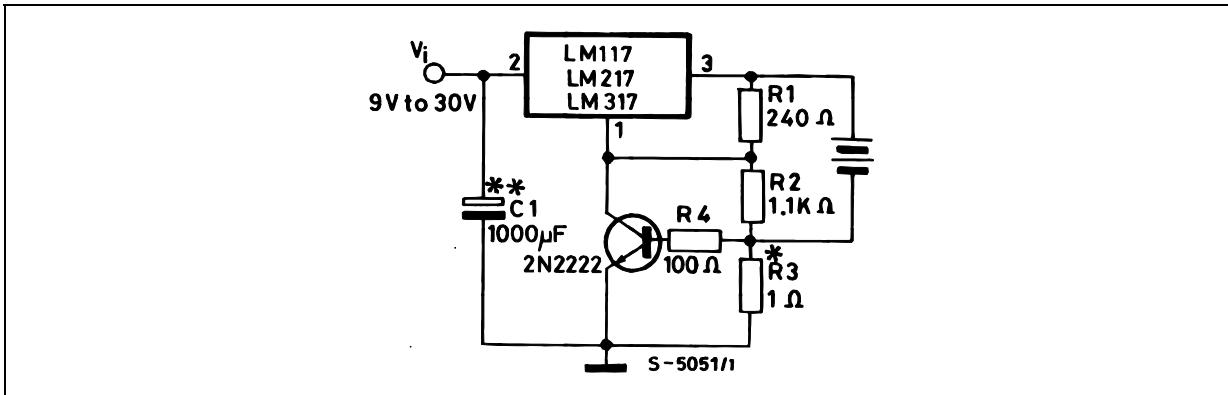


\*  $R_3$  sets peak current (0.6A for 1 0).

\*\*  $C_1$  recommended to filter out input transients


## TO-3 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A		11.85			0.466	
B	0.96	1.05	1.10	0.037	0.041	0.043
C			1.70			0.066
D			8.7			0.342
E			20.0			0.787
G		10.9			0.429	
N		16.9			0.665	
P			26.2			1.031
R	3.88		4.09	0.152		0.161
U			39.5			1.555
V		30.10			1.185	

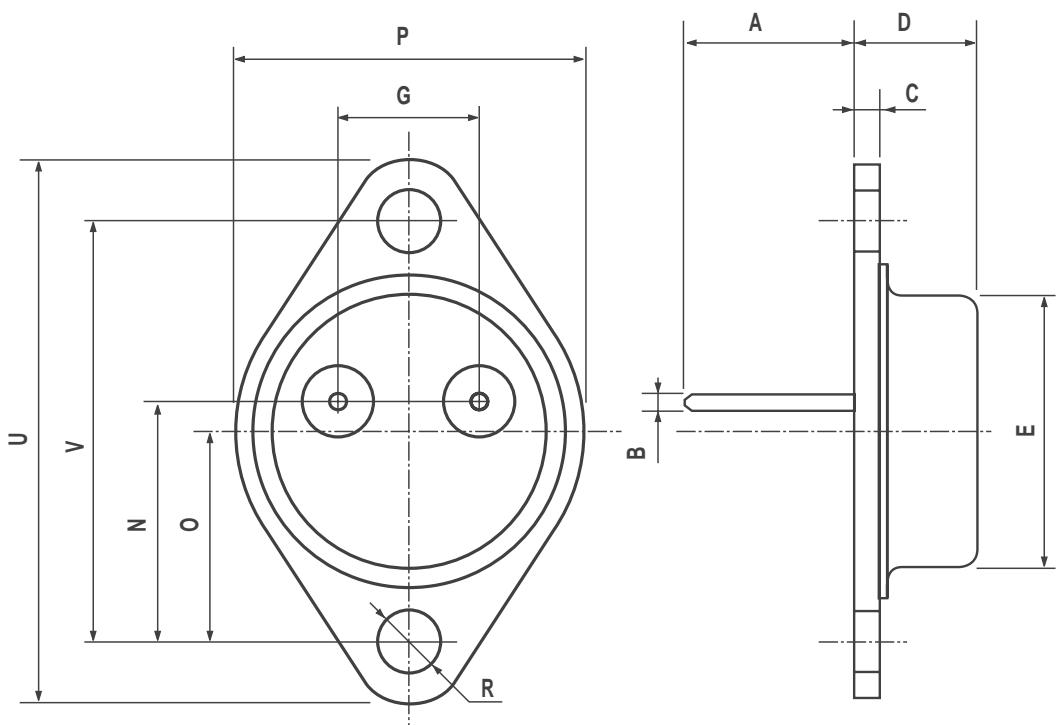


## TO-220 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
D1		1.27			0.050	
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.4		2.7	0.094		0.106
H2	10.0		10.40	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.2		6.6	0.244		0.260
L9	3.5		3.93	0.137		0.154
DIA.	3.75		3.85	0.147		0.151

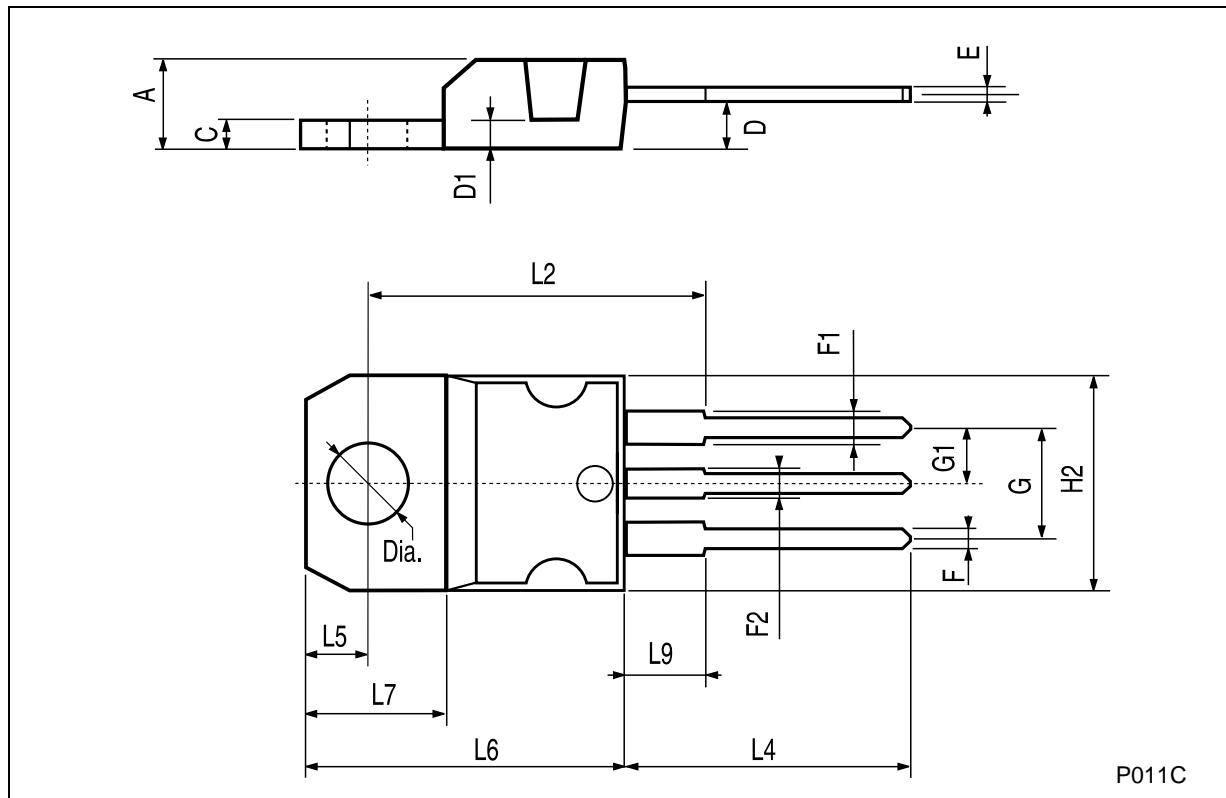

## TO-220FP MECHANICAL DATA


DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
B	2.5		2.7	0.098		0.106
D	2.5		2.75	0.098		0.108
E	0.45		0.70	0.017		0.027
F	0.75		1	0.030		0.039
F1	1.15		1.50	0.045		0.059
F2	1.15		1.50	0.045		0.059
G	4.95		5.2	0.194		0.204
G1	2.4		2.7	0.094		0.106
H	10.0		10.40	0.393		0.409
L2		16			0.630	
L3	28.6		30.6	1.126		1.204
L4	9.8		10.6	0.385		0.417
L6	15.9		16.4	0.626		0.645
L7	9		9.3	0.354		0.366
DIA.	3		3.2	0.118		0.126

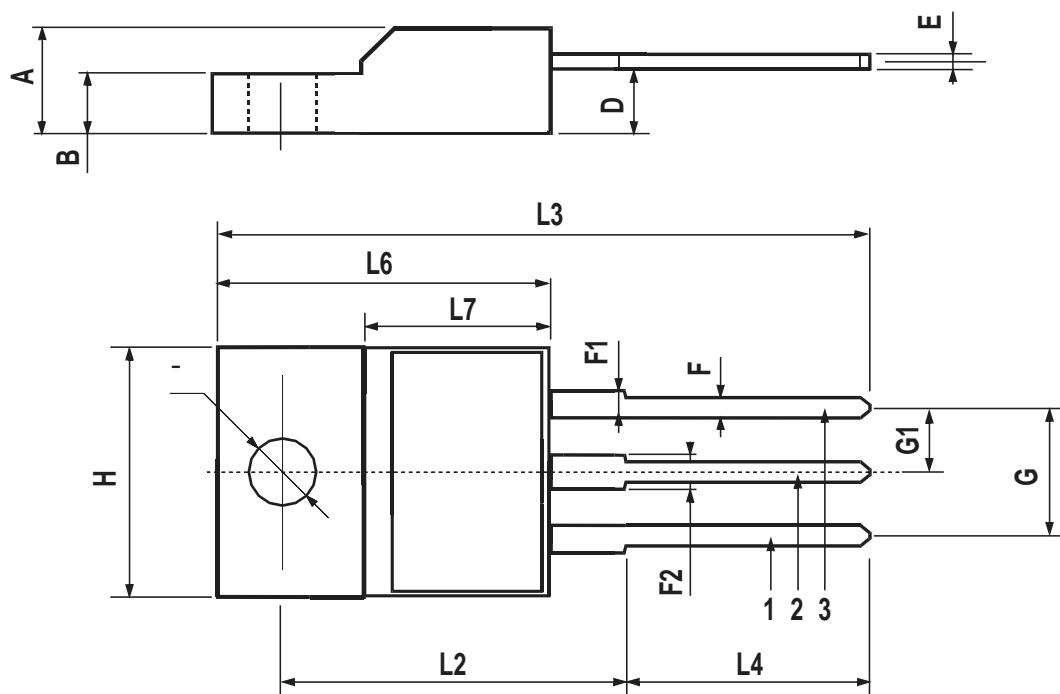

7012510/G


D<sup>2</sup>PAK MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.4		4.6	0.173		0.181
A1	2.49		2.69	0.098		0.106
A2	0.03		0.23	0.001		0.009
B	0.7		0.93	0.027		0.036
B2	1.14		1.7	0.044		0.067
C	0.45		0.6	0.017		0.023
C2	1.23		1.36	0.048		0.053
D	8.95		9.35	0.352		0.368
D1		8			0.315	
E	10		10.4	0.393		0.409
E1		8.5			0.335	
G	4.88		5.28	0.192		0.208
L	15		15.85	0.590		0.624
L2	1.27		1.4	0.050		0.055
L3	1.4		1.75	0.055		0.068
M	2.4		3.2	0.094		0.126
R		0.4			0.016	
V2	0°		8°	0°		8°

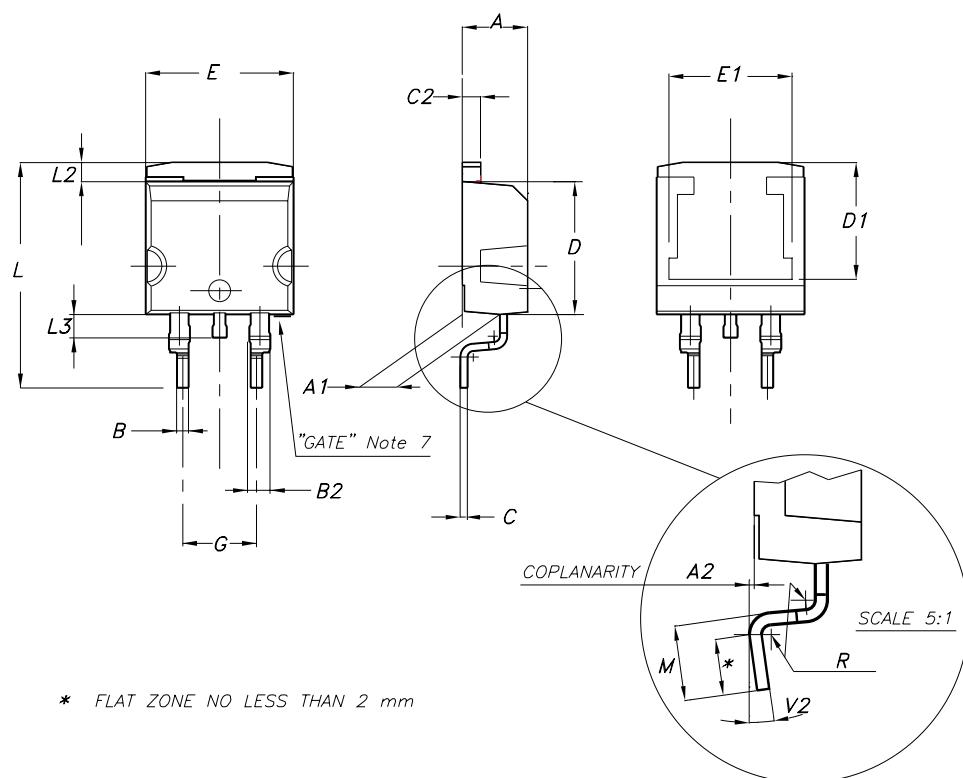

**Tape & Reel D<sup>2</sup>PAK-P<sup>2</sup>PAK-D<sup>2</sup>PAK/A-P<sup>2</sup>PAK/A MECHANICAL DATA**

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			180			7.086
C	12.8	13.0	13.2	0.504	0.512	0.519
D	20.2			0.795		
N	60			2.362		
T			14.4			0.567
Ao	10.50	10.6	10.70	0.413	0.417	0.421
Bo	15.70	15.80	15.90	0.618	0.622	0.626
Ko	4.80	4.90	5.00	0.189	0.193	0.197
Po	3.9	4.0	4.1	0.153	0.157	0.161
P	11.9	12.0	12.1	0.468	0.472	0.476

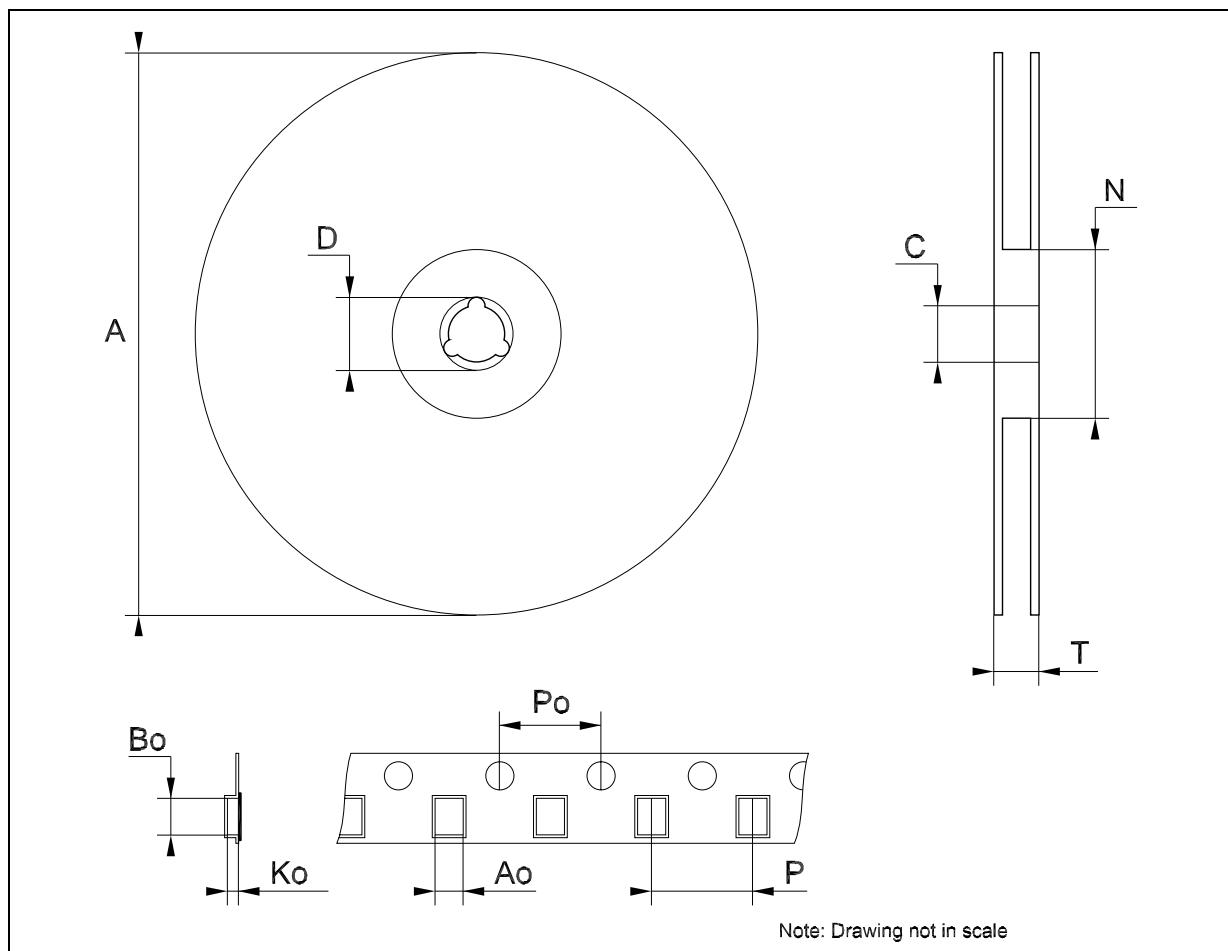

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics  
All other names are the property of their respective owners

© 2004 STMicroelectronics - All Rights Reserved  
**STMicroelectronics GROUP OF COMPANIES**

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.  
<http://www.st.com>