

38513-SW

SPDT Micro Reed Switch

SPDT (Form C) reed switch. Mini size, sealed, glass case, with formed leads.

Pull-In: 15-30AT (Ampere Turns)


Contacts Rated:

- Resistance: <100mΩ
- Power: 5VA/W max
- Max Switching Voltage: 175V
- Current: Carry: 1.5A DC/AC
- Switching: 0,25A

Leads: Tin Plated Ni/Fe

Body: 14.7mm (0.5") X 2.5mm (0.1")

L: 52mm (2") **O/A DIA:** 2.5mm (0.1") **WT:** .001

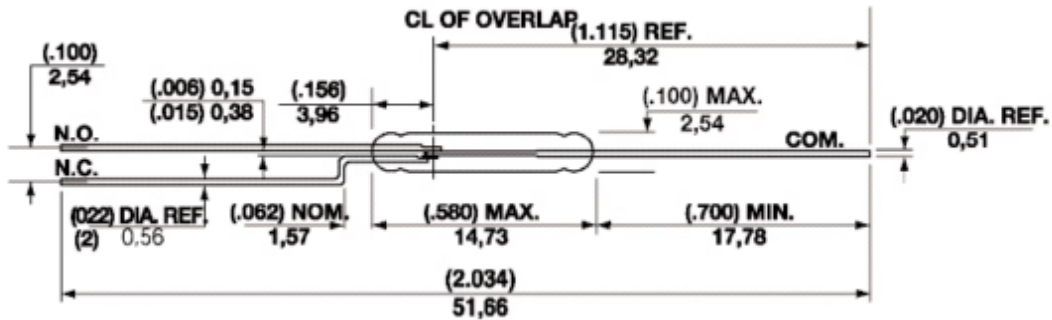

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice

All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

8380 Resource Rd. West Palm Beach, FL 33404
 800-652-6733 FAX 561-844-8764
 WWW.MPJA.COM