

MCH SERIES

ELECTRIC TOTALIZING COUNTER

- Small size electric counter with push button reset
- Economical, Lightweight
- Available in 3, 4, 5 & 6 Digits with different mounting options
- Applications : Business Machines, Vending Machines, Printing Press, Amusement Equipments, and all kinds of leased machines used for recording counts of movements

■ MODEL SELECTION




TYPE	MODELS	DIGITS	MOUNTING	WEIGHT
Additive Total Counter	MCH – 3P	3	Panel	130 grams
	MCH – 4P	4		140 grams
	MCH – 5P	5		160 grams
	MCH – 6P	6		180 grams
	MCH – 3X	3	Bail	110 grams
	MCH – 4X	4		120 grams
	MCH – 5X	5		140 grams
	MCH – 6X	6		140 grams
	MCH – 3S	3	Rear	100 grams
	MCH – 4S	4		110 grams
	MCH – 5S	5		130 grams

■ SPECIFICATIONS




Power Source	AC 100V, 200V 50/60 Hz convertible / DC 12V, 24V
Voltage Fluctuation	±10%
Power Consumption	AC : 3.8 ~ 4.0VA ; DC : 2.2 ~ 2.8W
Continuous Energizing	Less than 5 minutes
Counting Method	One pulse – One count (energizing – ½ count, unenergized – ½ count)
Counting Speed	15 Hz (maximum)
Pulse Width	33msec. minimum
Make (Duty)	1 : 1
Display	3.8 × 1.6mm (white on black background)
Reset	Manual Reset (push button)
Connection	Lead Wire (250 mm)
Operating Temperature	-5°C ~ +40°C (non-freezing)
Operating Humidity	85% RH maximum (non-condensing)
Test Voltage	AC1,500V for 1 minute
Insulation Resistance	20MΩ minimum (DC500V megger)
Vibration	Endurance : 16.7 Hz, Width, double amplitude 4mm Mismovement : 10 ~ 55 Hz, double amplitude 0.5mm
Shock	Endurance : 300 m/s (30G) / Mismovement : 50 m/s (5G)
Construction	P Models : Plastic Panel (Noryl), Black ; Metal Cover / S Models : Black Noryl

DIMENSIONS




MCH-3P

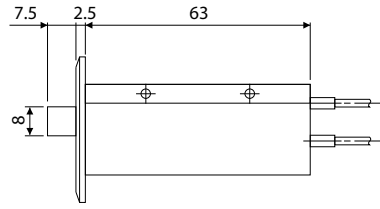




MCH-4P

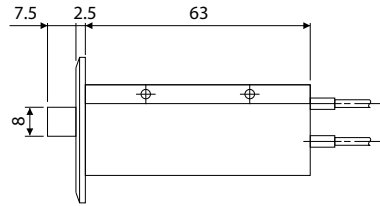




MCH-5P

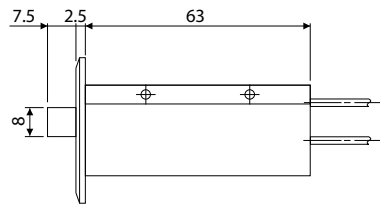




MCH-6P

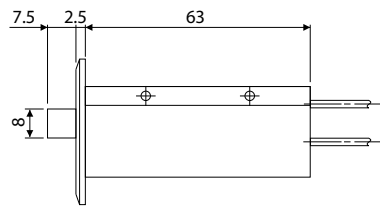




MCH-3X

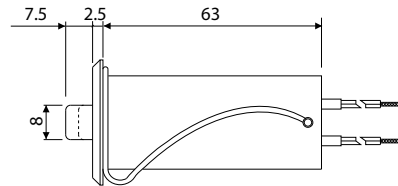




MCH-4X

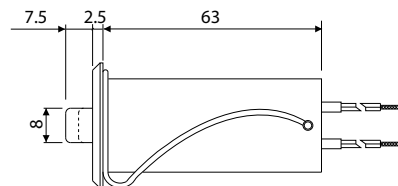




MCH-5X

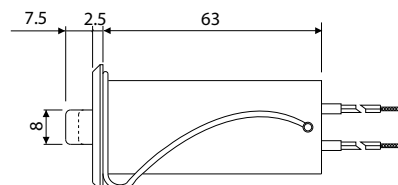




MCH-6X

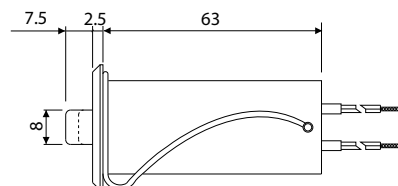




MCH-3S

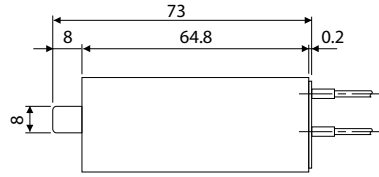

MCH-4S

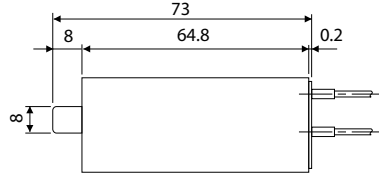

MCH-5S

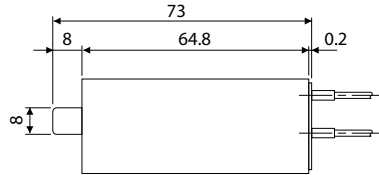

This catalog was last revised August. 26, 2010.

*Subject to change without prior notice.

All Rights Reserved, Copyright © 2010, LINE SEIKI CO., LTD.



LINE SEIKI CO., LTD.

Address : 37-7, Chuo-Cho, 2-Chome, Meguro-ku
Tokyo 152-0001 JAPAN

Contacts : Tel: +81-3-3716-5151 Fax: +81-3-3710-4552
E-mail: webtrade@line.co.jp

URL : <http://www.lineseiki.com>