



## 37226-RL

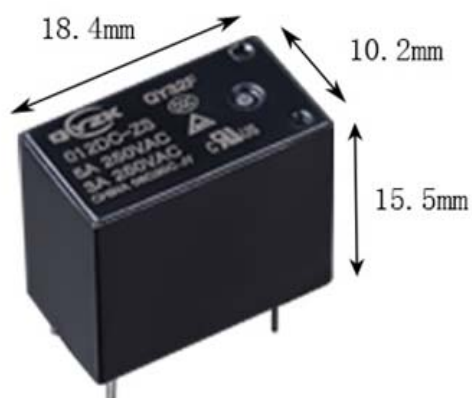


Specific model :	QY32F-012DC-ZS
Coil voltage :	12VDC
Contact form :	(1 Form C) - 5 pins
Contact rating:	5A 250VAC
Coil power:	0.45w
Size:	18.4mm*10.2mm*15.5mm
Certification:	UL; TUV; CQC

Relay related parameters (Different parameters)	
Relay model	Relay parameters
QY32F-005DC-HS	5VDC,5A,SPST-NO (1 Form A),4pin,0.45w
QY32F-012DC-HS	12VDC,5A,SPST-NO (1 Form A),4pin,0.45w
QY32F-024DC-HS	24VDC,5A,SPST-NO (1 Form A),4pin,0.45w
QY32F-005DC-ZS	5VDC,5A,SPDT (1 Form C),5pin,0.45w
QY32F-012DC-ZS	12VDC,5A,SPDT (1 Form C),5pin,0.45w
QY32F-024DC-ZS	24VDC,5A,SPDT (1 Form C),5pin,0.45w
QY32F-G-005DC-HS	5VDC,10A,SPST-NO (1 Form A),4pin,0.45w
QY32F-G-012DC-HS	12VDC,10A,SPST-NO (1 Form A),4pin,0.45w
QY32F-G-024DC-HS	24VDC,10A,SPST-NO (1 Form A),4pin,0.45w
QY32F-U-003DC-HD2L	3VDC,10A,SPST-NO (1 Form A),5pin,0.2w
QY32F-U-005DC-HD2L	5VDC,10A,SPST-NO (1 Form A),5pin,0.2w
QY32F-U-012DC-HD2L	12VDC,10A,SPST-NO (1 Form A),5pin,0.2w
QY32F-U-024DC-HD2L	24VDC,10A,SPST-NO (1 Form A),5pin,0.2w
QY32F-U-003DC-HD1L	3VDC,10A,SPST-NO (1 Form A),4pin,0.2w
QY32F-U-005DC-HD1L	5VDC,10A,SPST-NO (1 Form A),4pin,0.2w
QY32F-U-012DC-HD1L	12VDC,10A,SPST-NO (1 Form A),4pin,0.2w
QY32F-U-024DC-HD1L	24VDC,10A,SPST-NO (1 Form A),4pin,0.2w

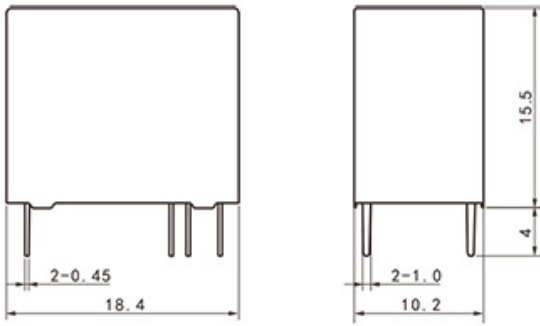


Undimensioned tolerance:  $<1\text{mm}$ :  $\pm 0.2\text{mm}$   $1\sim 5\text{mm}$ :  $\pm 0.3\text{mm}$   $>5\text{mm}$ :  $\pm 0.4\text{mm}$


Note: 1.The size of the lead foot is pre welding dimension.  
2.installation hole size tolerance:  $+ 0.1\text{mm}$

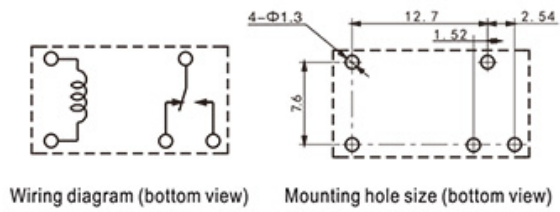

1Z

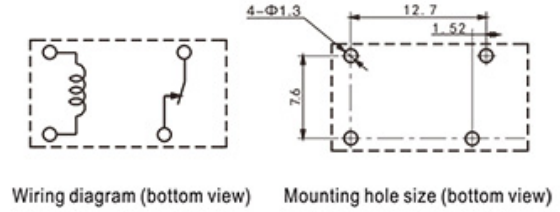

1D

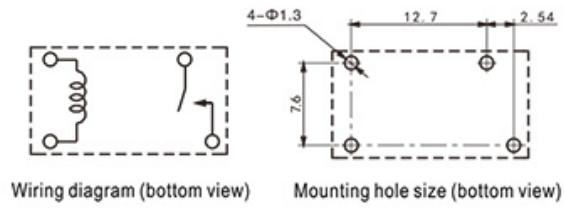

1H