


37625-BR




50A 1KV Bridge

QL50A-10 Bridge Rectifier
 Rated 50A@1000VAC.
 .25" Quick Connect terminals.
 Epoxy Filled Metal Body
 REQUIRES HEATSINKING
 L: 1-3/8" W: 1-1/4" H: 1" O/A WT: .1

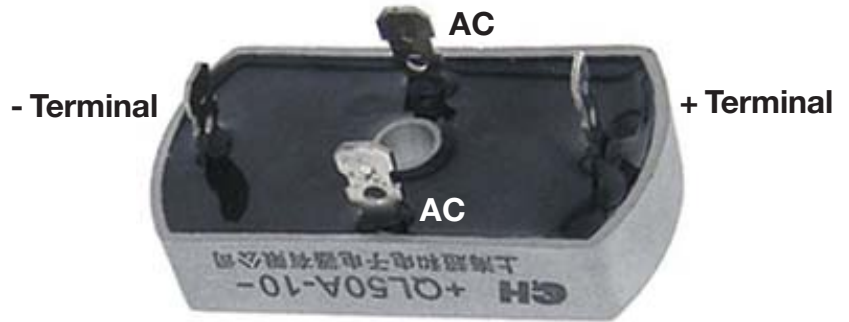

型号 TYPE	整流电流 IF(AV)A	正向电压 VF(AV)V	反向重复峰值电压 VRRM VRWM V	反向电流		浪涌电流 IFSM A	工作结温 TJ °C	贮存温度 Tstg °C
				IR1	IR2			
				UA	UA			
QL50A	50	1.5	100~1600	70	2000	450	-40~+125	-40~+130

POLARITY NOTE: Terminals UP, Writing Facing You

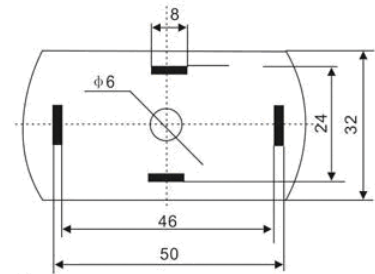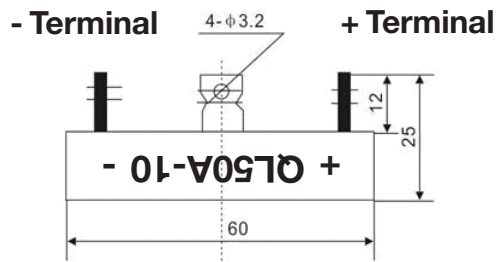

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
 All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
 800-652-6733 FAX 561-844-8764
 WWW.MPJA.COM