


38254-RL

Delay "ON"/Delay "OFF" Dual Timing Relay 15Minutes/100Seconds

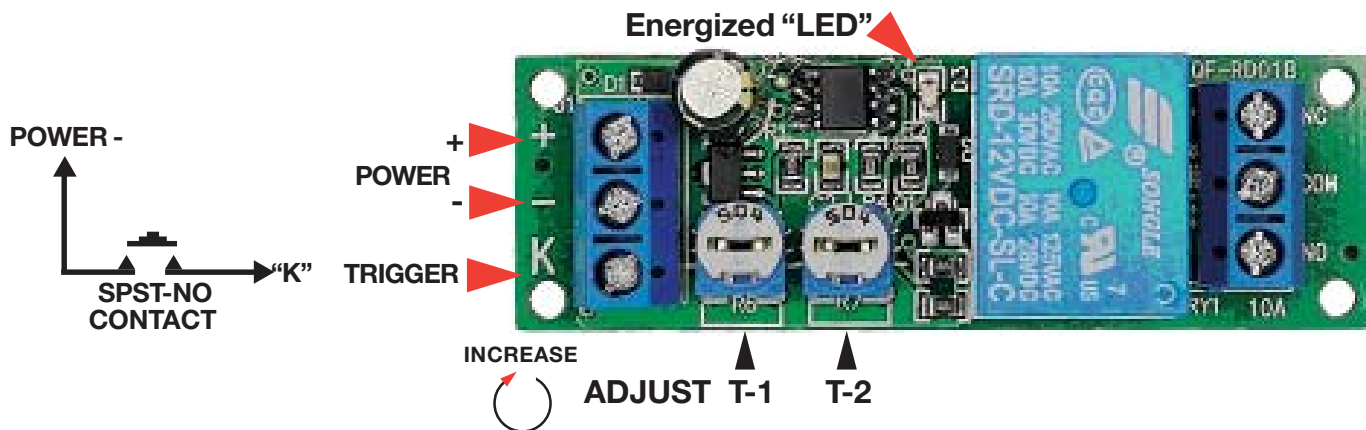

Adjustable Delay on Turn-On and Delay on Turn Off Relay Module. Trigger Input starts Turn ON delay Time, after delay, relay is energized until the OFF Delay Time expires.

NOTE: Trigger is locked out for entire timing cycle.

PN: QF-RD-01BC

Module Voltage: 12VDC (10-16V) @ <60mA Energized

Trigger: Low level signal (Ground)

T-1 Delay to ON: 0~15 Minutes (Contact Open)

T-2 Delay to OFF: 0~100 Seconds
(Contact Closed)

Contact Open (Idle) at Power up & after Cycle

Screwdriver adjustment of timing

Relay: SPDT


Contacts: 10A 125/250VAC/30VDC

Temperature Range: -40°~85°C

Humidity Range: 0%~90%RH

L: 65mm (2-9/16") **W:** 21mm (13/16")

H: 19mm (3/4") **WT:** .04

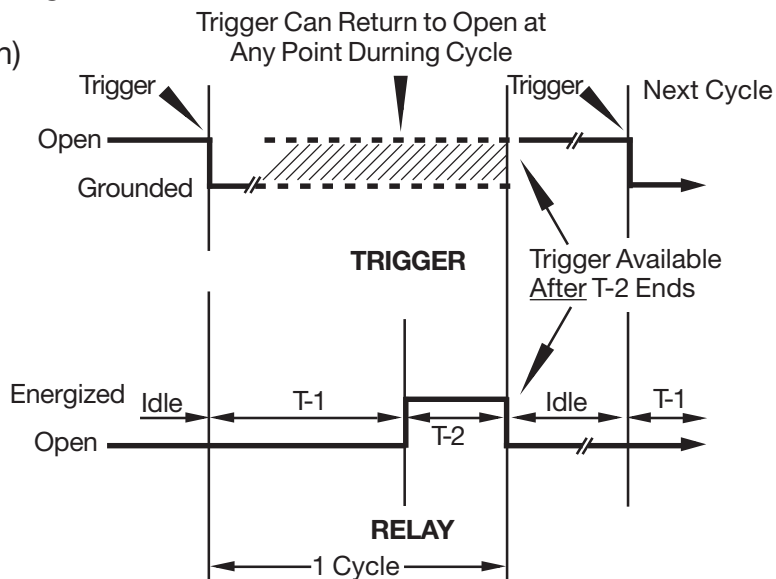

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM