

38666-MI

Running Time Meter, 99999.9 hours

Compact, 6 digit Running Time (Elapsed) Time panel meter.
Locking Front Panel Manual Reset and Electrical Reset terminals on back.
Back Panel terminals to enable timing.
6.7mm Character Height LCD Display
Long Term Error: 0.02%
Internal Battery powered with 4+year lifetime.
4-30VDC Input to enable counting
4-30VDC Pulse to Reset.
Timing Range: 0-99999.9 hrs
Cutout: 45mmx22.2mm
W: 48mm (~1-7/8") **H:** 24mm (~15/16") **WT:** .15


**MANUAL
RESET & LOCK**



NOTE:

TIME: Starts at last total value unless Reset

RESET: Manual: Slide Button "UP" From "LOCK" Position then Press firmly
Electrical: Apply 4-30VDC to Terminals 3+ & 4- Momentary only.

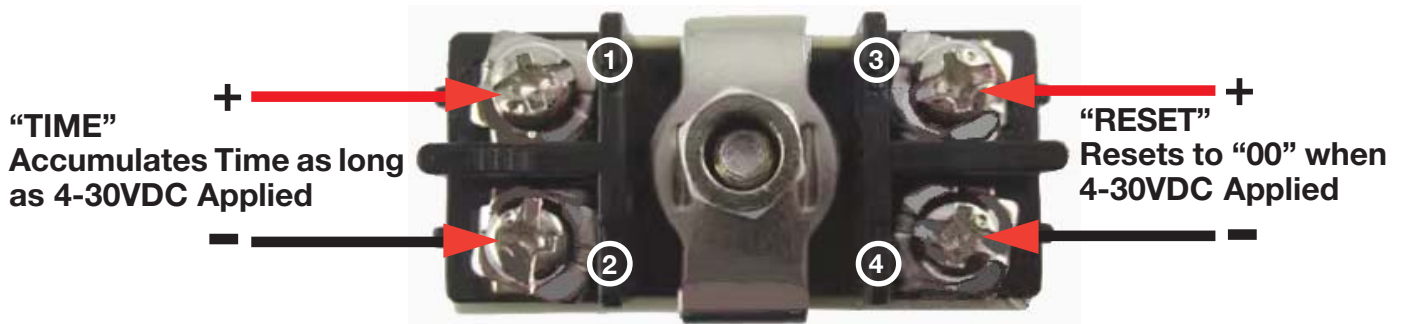

Number's Marked On Case

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice

All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

8380 Resource Rd. West Palm Beach, FL 33404
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM